

Salbæk Technology Group
support@sal-tech.com
Skype: easy.packaging

GUIDELINES ON H-46 M2 OPERATION


First, let's take a look at its structural components at every angle. Indicated below are the list of parts.

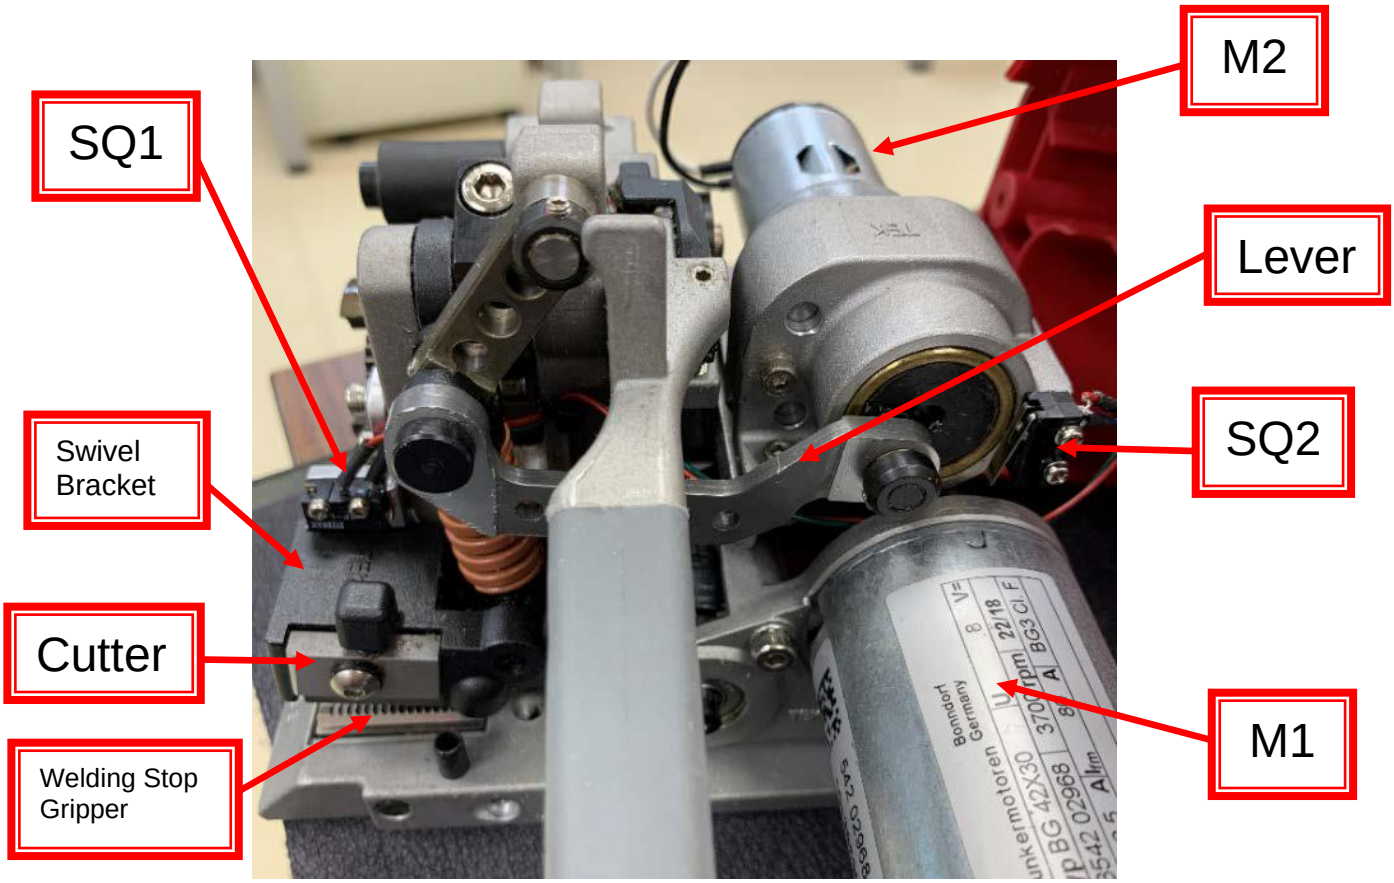


© Copyright 2019 Salbæk Technology Group

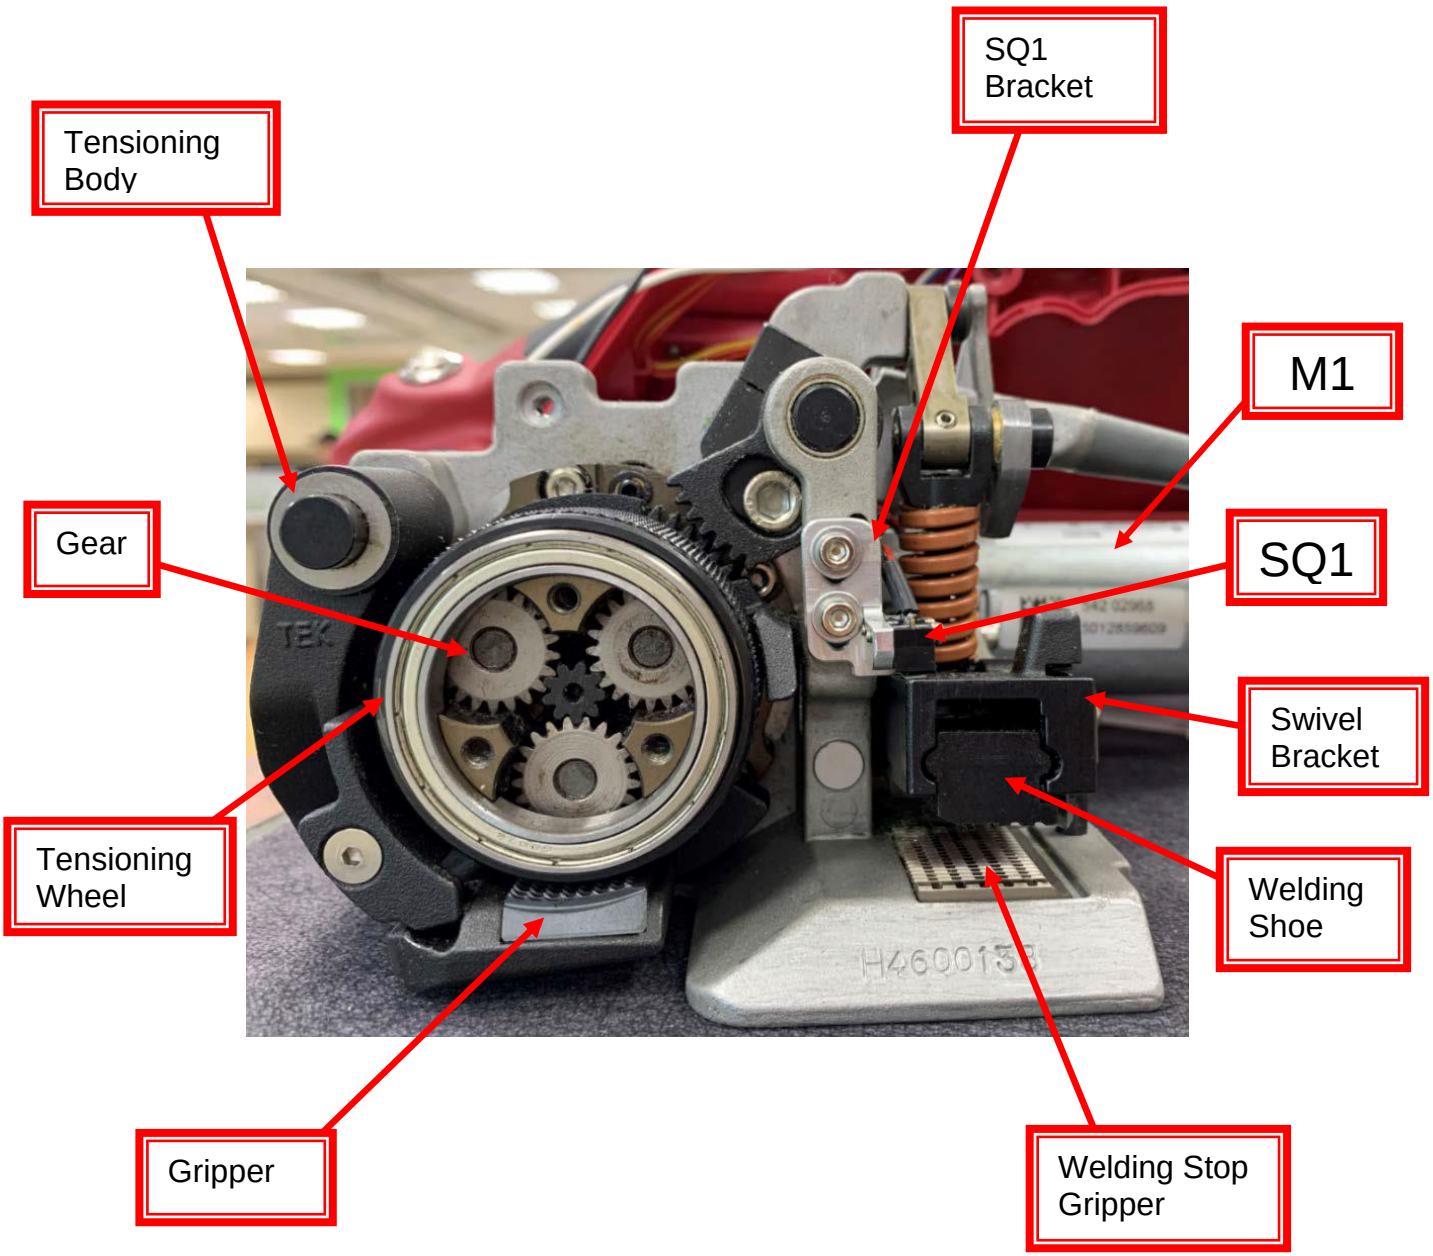


© Copyright 2019 Salbæk Technology Group

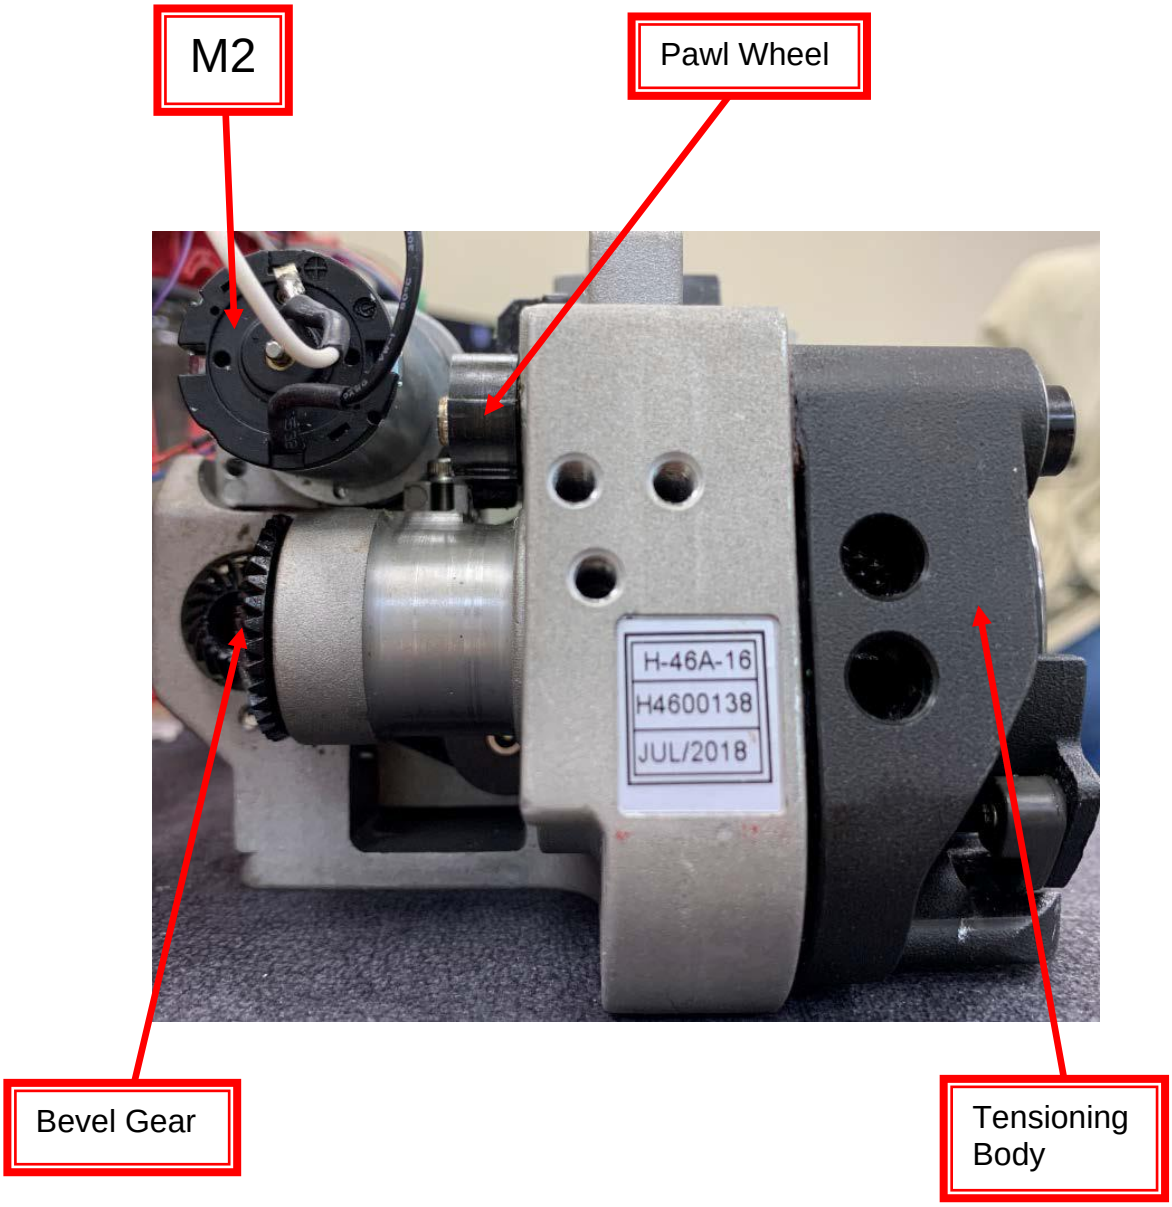


© Copyright 2019 Salbæk Technology Group

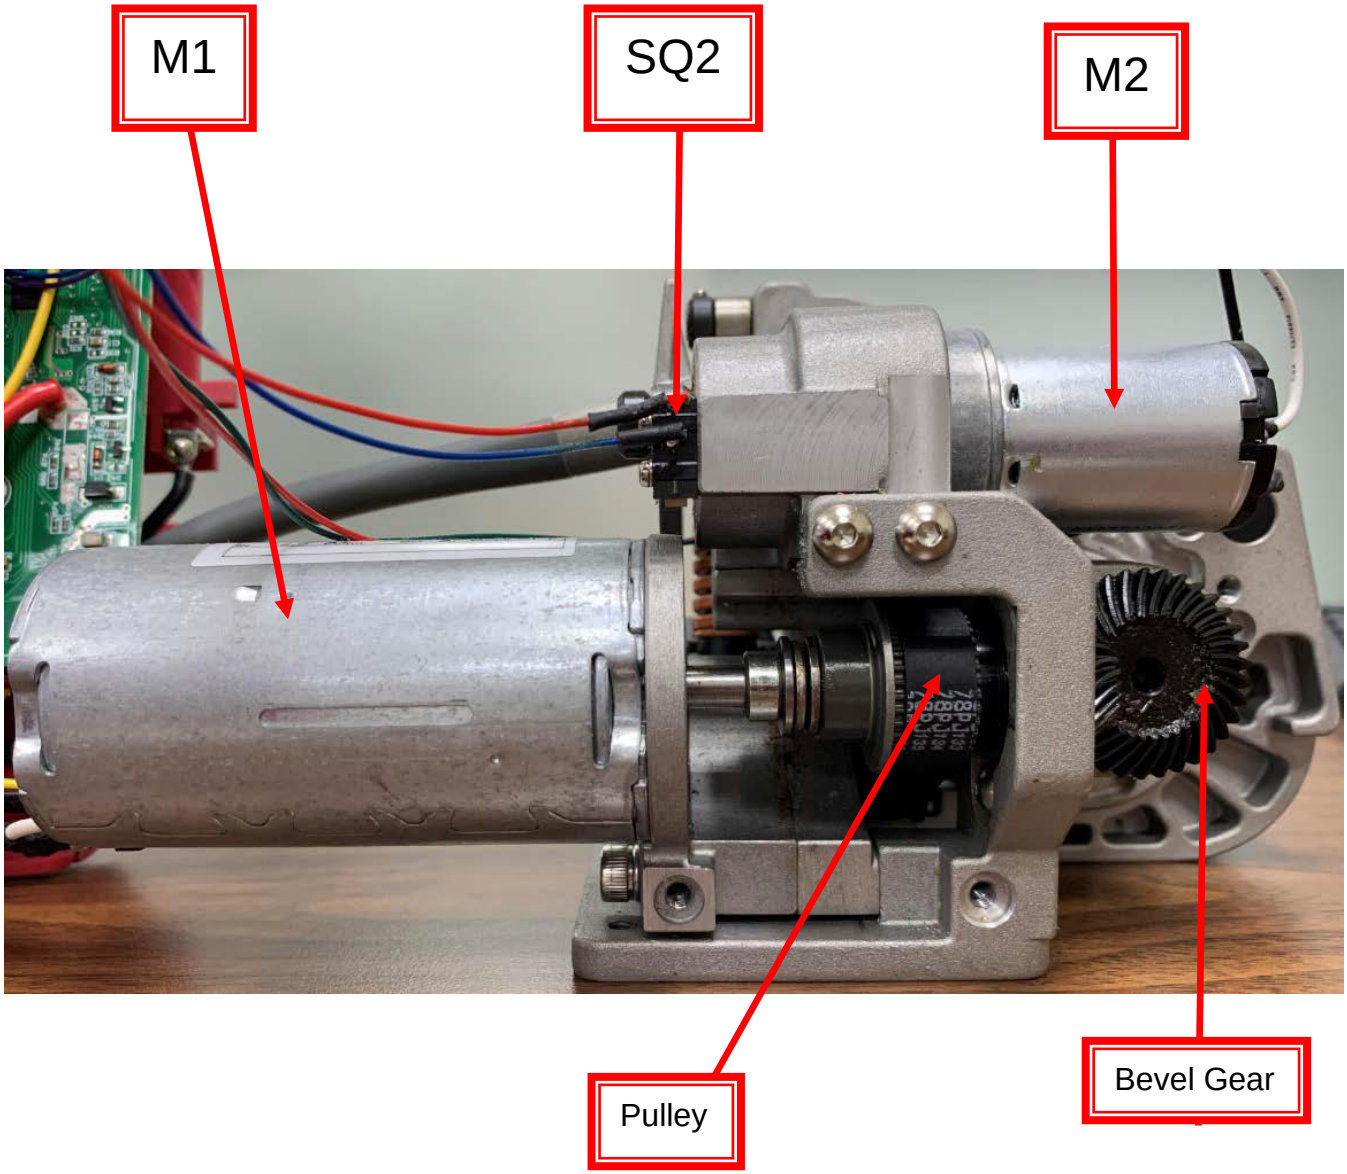

© Copyright 2019 Salbæk Technology Group

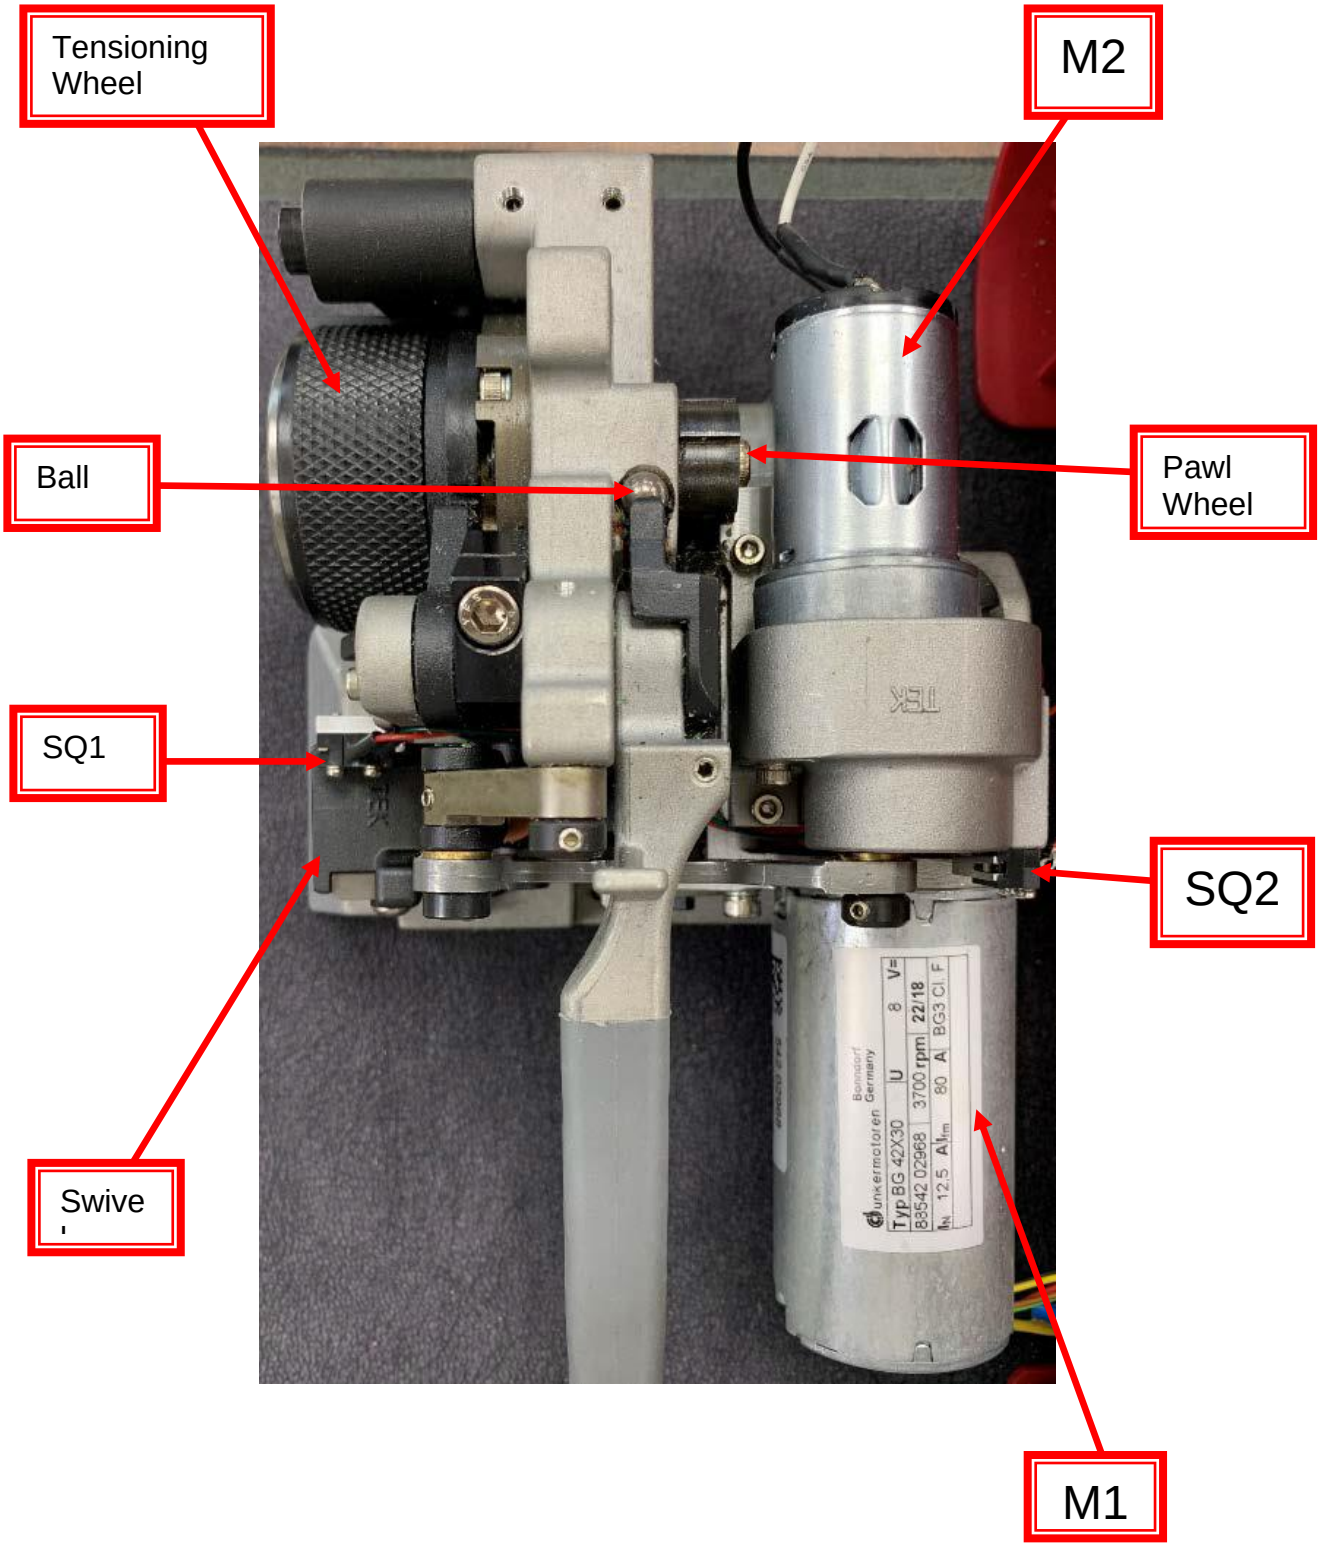

© Copyright 2019 Salbæk Technology Group

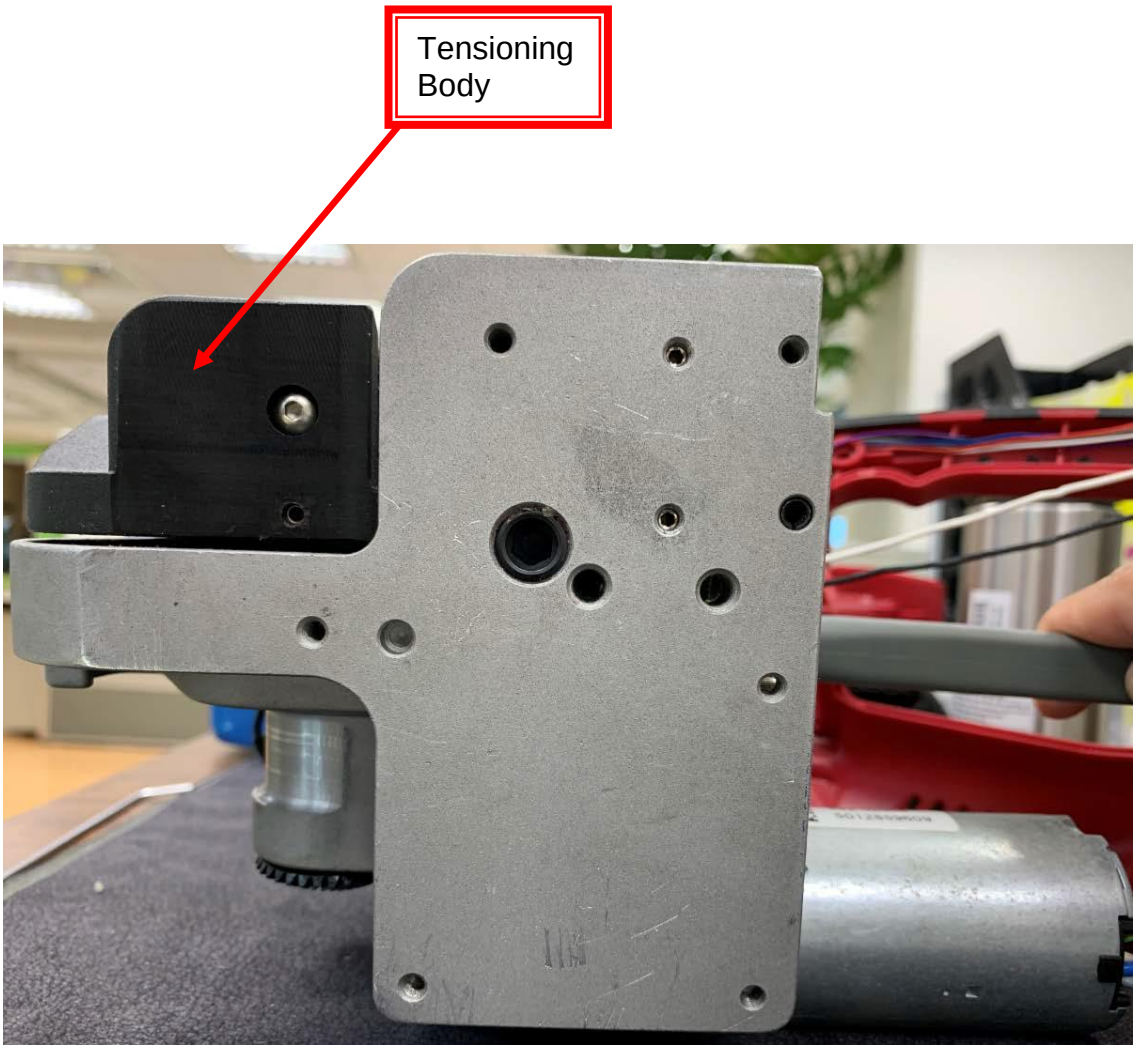

© Copyright 2019 Salbæk Technology Group

M2 Function

Follow the Steps Correctly in setting SQ1 Bracket.



1. Adjust the SQ1 bracket to the topmost position.
2. Perform a sealing test.
3. If the SQ1 can be triggered normally, then it’s good to go.
4. If the SQ1 cannot be triggered normally, then lower the bracket by 1mm, then back to step ”2”

© Copyright 2019 Salbæk Technology Group