 Copyright © 2018 Sal-Tech.com

STEP TP-502MV & STEP TP-502MVB


A Semi – Automatic Pallet Strapping Machine, suitable for corrugated card boards, concrete blocks and loaded pallet with cardboard boxes holding any type of products. Provides ergonomic and cost – effective solution for low volume vertical pallet strapping applications. Eliminates the use of manual tools, dispensers and can be moved easily beside the load you want to strap without moving the pallet.



Features:

- Direct Drive Technology with German Made DC Motors
- Electronic Tension Control
- Compact Mechanical Strapping Head
- Jog Switch
- Good for Lower Height Pallet
- Adjustable Weld Cooling Time
- Mobility
- Various Applications



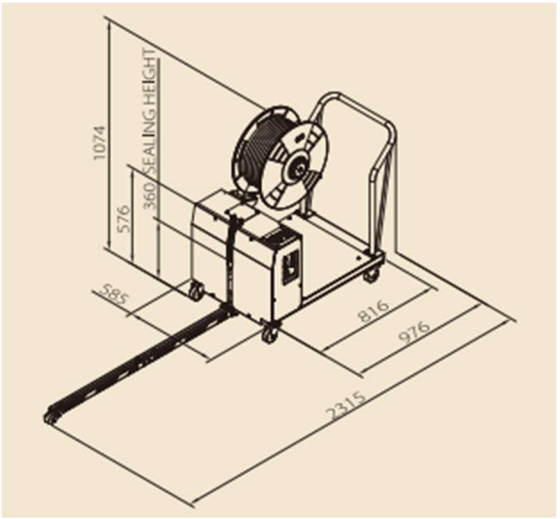

Specification		
Description	**STEP TP-502MV**	**STEP TP-502MVB**
Strap Type	PP Strap	PP Strap
Strap Width	9mm, 12mm, 15.5mm	9mm, 12mm, 15.5mm
Strap Thickness	0.6 – 0.8mm	0.6 – 0.8mm
Strapping Speed	18sec., 1 Strap (Package Size 1200L x 800W x 1000H mm)	18sec., 1 Strap (Package Size 1200L x 800W x 1000H mm)
Min. Package Height	380mm (Pallet is included)	380mm (Pallet is included)
Strap Core Inner Diameter	200mm (280mm is also available)	200mm (280mm is also available)
Tension Range	8 Kg – 70 Kg	8 Kg – 70 Kg
Length of the Sword	1250mm	1250mm
Net Weight	93 Kg	153 Kg
Machine Dimension	585W x 2315D x 1074H mm	585W x 2315D x 1074H mm
Power Consumption	0.33 Kw	0.33 Kw
Temperature of Working Environment	5 – 40°C	5 – 40°C
Electrical Requirements	110V, 220V, 230V, 240V 50/60Hz 1Ph	110V, 220V, 230V, 240V 50/60Hz 1Ph or Battery
Battery Spec	NA	VRLA Type, 12V, 50Ah (2 Pieces)
Battery Charge Time	NA	5-7 HOUrs (depends on the environment)
Battery Capacity	NA	Approx. 1000 – 1500 strapping cycles per charge (depends on package size and tension)
Battery Lifespan	NA	Approx. 300 Charges
STEP Item no.	410000150 for 230V 50Hz Version	41000160 for 230V 50Hz version